

## WR

### Wall Mounted Room Thermostats

- Heavy Duty  
25 Amps, 120 Vac  
22 Amps, 240 Vac  
18 Amps, 277 Vac
- Positive Snap-Action Switch
- 3 Degree Control Differential
- UL Listed, CSA Certified



**WR-80**

#### Description

**WR-80**  
Range 40-80°F Internal Sensing Element  
Indicating Thermometer

**WR-90**  
External Sensing Bulb Range 20-90°F

The WR Series Room Thermostats are designed to directly control individual heaters or, by using an external contactor, can control several heaters. The WR-90 is particularly useful for maintaining lower temperatures (in




**WR-90**

garages, warehouses, etc.) and avoiding unnecessary heating costs.


Each design has accuracy and provides long reliable service with a 3 degree control differential. Both units are heavy duty, single stage, with a SPST line voltage snap-action switch and are finished with tough, metallic gray enamel housings.

**WARNING: Hazard of Fire.** The WR thermostats are designed for temperature control service only. Because they do not fail-safe, they should not be used for temperature limiting duty.

#### Dimensions

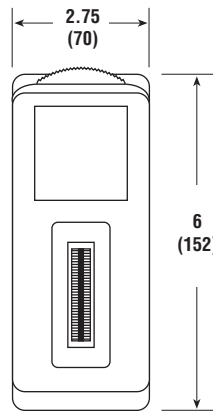


**Front View**

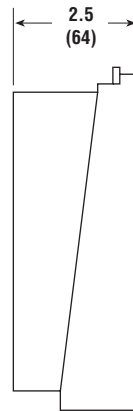


**Side View**

**WR-80**

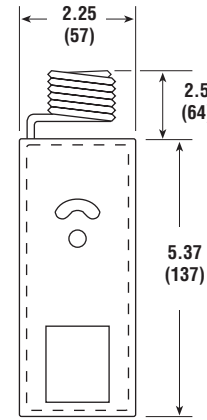

**Front View**

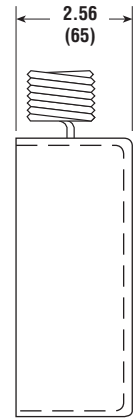

**Side View**

**WR-90**

All Dimensions in Inches (mm)

#### Specifications and Ordering Information

Model	Temp. Range (°F)	Voltage/Current			Stock	PCN	Wt. (Lbs.)
		120V	240V	277V			
WR-80	40 - 80	25A	22A	18A	S	263177	1
WR-90	20 - 90	25A	22A	18A	S	263185	1

**Stock Status:** S = stock AS = assembly stock NS = non-stock

**Note —**

1. Pilot Duty rating, 125 VA for 120 - 277 Vac.