



## NE SERIES, NON-INDICATING ELECTRONIC COMBINATION CONTROLS


MODEL NUMBER	VOLTS	MAX. AMPS	REPL. RELAY P/N	REPL. RELAY P/N LESS TRANS.	REPL. TRANS.	REPL. SENSOR P/N	SHIP WGT. Lbs./kg)
NE302	240	30	AH30-1	AH30-2	HD50 2/1	RTD1000	15
NE304	480	30	AH30-1	---	HD50 4/1	RTD1000	(7)
NE502	240	50	AH50-1	AH50-2	HD50 2/1	RTD1000	16
NE504	480	50	AH50-1	---	HD50 4/1	RTD1000	(7.5)
NE752	240	75	AH75-1	AH75-2	HD100 2/1	RTD1000	22
NE754	480	75	AH75-1	---	HD100 4/1	RTD1000	(10)
NE902	240	90	AH90-1	AH90-2	HD100 2/1	RTD1000	24
NE904	480	90	AH90-1	---	HD100 4/1	RTD1000	(11)
NE1202	240	120	AH120-1	AH120-2	HD150 2/1	RTD1000	26
NE1204	480	120	AH120-1	---	HD150 4/1	RTD1000	(12)
NE1502	240	150	AH150-1	AH150-2	HD150 2/1	RTD1000	32
NE1504	480	150	AH150-1	---	HD150 4/1	RTD1000	(14.5)

Combination control consists of gasketed plastic enclosure, thermostat, contactor and optional control transformer. To omit step-down transformer, add "LT" to end of model number.

## Product Features and Benefits:

- ◆ **IMPROVES PROCESS CONTROL:** Large, easy to read dial. Provides precise temperature control for consistent plating and etch rates in most aqueous processes.
- ◆ **TEMPERATURE SENSOR:** Fluoropolymer (FEP) covered 10-foot (3m), 1000-ohm platinum RTD sensor included standard with the control. Provides extended service in corrosive liquids and can be lengthened with ordinary copper hookup wire.
- ◆ **CORROSION RESISTANT ENCLOSURE:** NEMA 1, IP23, flame retardant, gasketed plastic enclosure with stainless steel hardware.
- ◆ **CERTIFICATIONS:** cUL.
- ◆ **CAPACITIES:**
  - Large switching capacities from 30 to 150 amps for either 240 or 480 volts (other voltages available).
  - Adjustable temperature range from 50°F (10°C) to 250°F (120°C).
  - +/- 2°F (1°C) accuracy.
  - 20°F (-7°C) to 130°F (54°C) ambient temperature range.
- 120, 208, 380, 415, 600 and other voltages available.
- Single or three phase.
- Control transformer required above 240 volts, and recommended for 208 and 240 volt service.
- ◆ **SAFETY FEATURES:**
  - Pre-wired PI terminal blocks.
  - Ground connection on wiring panel.
  - Sensor short and break protection.
- ◆ **OPTIONS AVAILABLE** (consult factory):
  - 25-foot (7.6m) and 50-foot (15.2m) sensors.
  - Pre-wired outlets for plug-in heaters (some sizes).
  - Ground fault protection (GFP) circuitry.
  - PII or PIII thermal protection systems.
  - Integral liquid level components.
  - Front panel mounted digital timers.
  - 150°F to 550°F (65°C to 290°C) temperature range.
  - Outdoor enclosures.

## DIMENSIONS

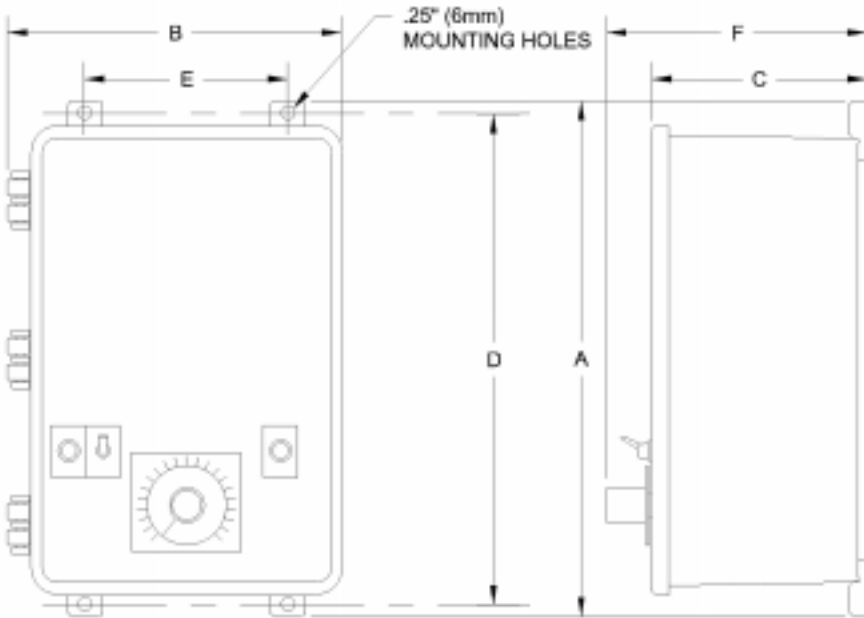

Dimensions	30-50 Amps	75-120 Amps	150 Amps
A	14.375" (365 mm)	15.5" (394 mm)	17.5" (445 mm)
B	9.5" (241 mm)	13.75" (349 mm)	15.75" (400 mm)
C	6.25" (159 mm)	7.625" (194 mm)	8.375" (213 mm)
D	13.625" (346 mm)	14.75" (375 mm)	16.75" (425 mm)
E	6" (152 mm)	10" (254 mm)	12" (305 mm)
F	7.09" (180 mm)	8.465" (215 mm)	9.215" (234 mm)

## NE COMBINATION CONTROL ORDERING INFORMATION

Series	Amperes	Voltage	Misc. Options	Stepdown Transformer	Standard Options
NE	30 50 75 90 120 150  1 = 120 2 = 240 4 = 480 -208- = 208 -380- = 380 -415- = 415 -600- = 600 (or specify)			-LT = no transformer (not for voltages higher than 240V)  x = misc options not listed in last column such as: -branch fusing -larger relays -multiple relays -pump controls -NEMA 4X enclosure	-PII = thermal protector II -PIII = thermal protector III -LC = conductive liquid level -ESP = capacitive liquid level terminals -DTS = digital timer -GFP = ground fault detection -25 = 25 foot RTD sensor -50 = 50 foot RTD sensor -TEF = additional FEP sensor sleeve -H = high temperature sensor -E = outlet for plug-in heater

### ORDERING EXAMPLE:

NE302-LT-PII

NE series combination control, 30 amps, 240 volt, less step down transformer, PII thermal protector option.

