



Curves

GN 10 AMP SSR (1200 & 600 V)

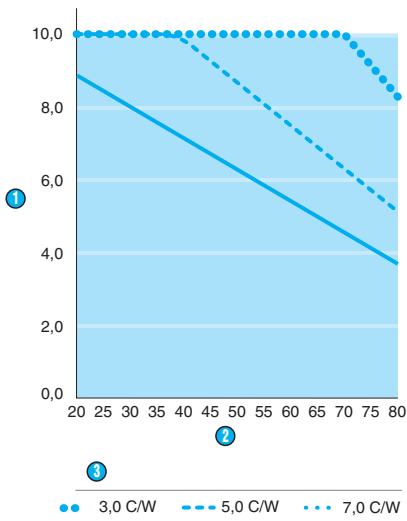


- ① Load current (A)
- ② Ambient temperature (°C)
- ③ Heatsink

GN 25 AMP SSR (1200 & 600 V)

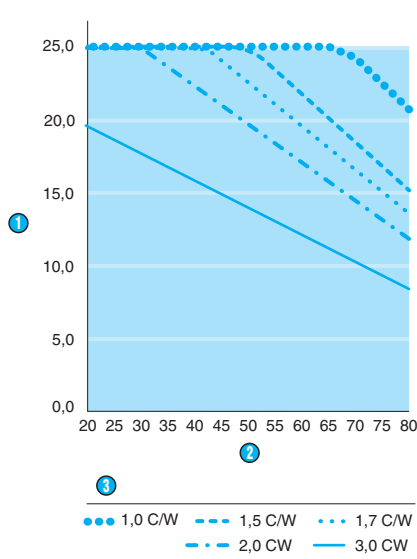


- ① Load current (A)
- ② Ambient temperature (°C)
- ③ Heatsink

GN 50 AMP SSR (1200 & 600 V)

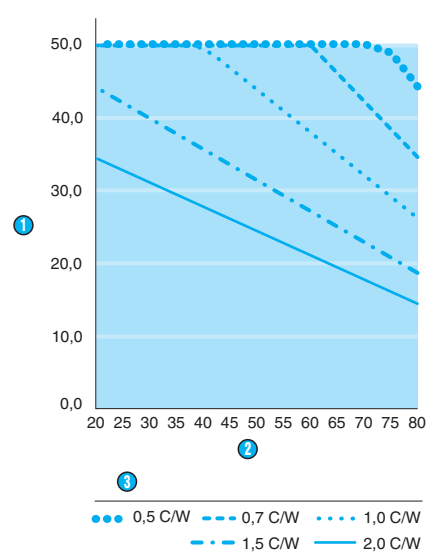


- ① Load current (A)
- ② Ambient temperature
- ③ Heatsink

GN 75 AMP SSR (1200 & 600 V)

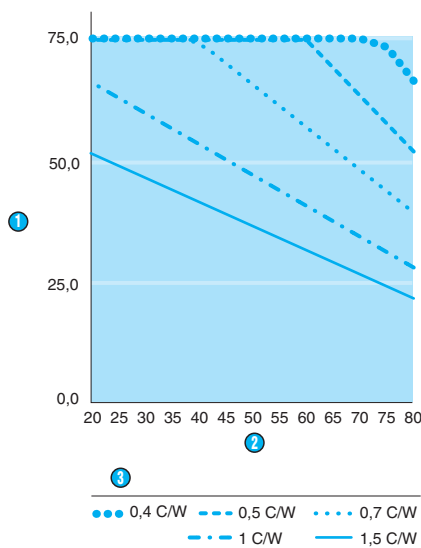


- ① Load current (A)
- ② Ambient temperature (°C)
- ③ Heatsink

GN 100 AMP SSR (1200 & 600 V)

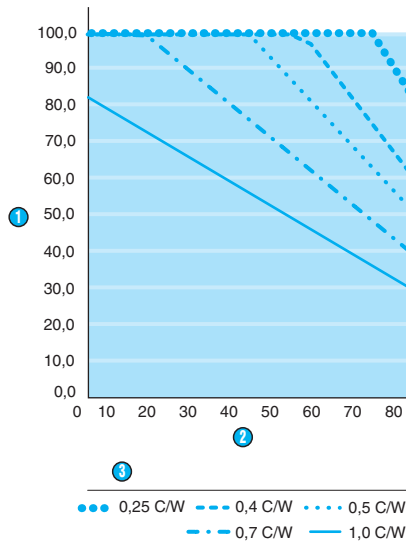

- ① Load current (A)
- ② Ambient temperature (°C)
- ③ Heatsink

GN 125 AMP SSR (1200 & 600 V)

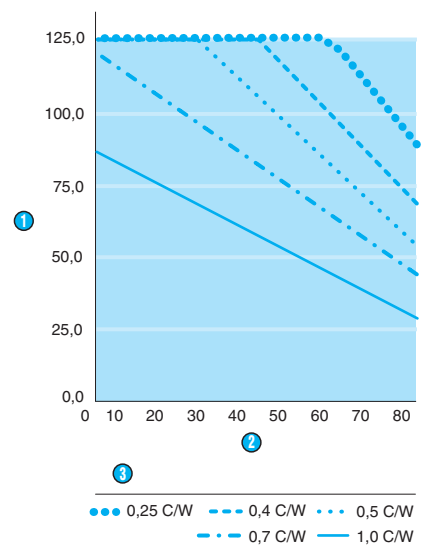

- ① Load current (A)
- ② Ambient temperature (°C)
- ③ Heatsink

5