



## Round SRMU Heat Blanket Part Number Guide



Diameter in (mm)	2.5Watts/in <sup>2</sup> (.004 Watts/mm <sup>2</sup> )	5Watts/in <sup>2</sup> (.007 Watts/mm <sup>2</sup> )	10 Watts/in <sup>2</sup> (.016 Watts/mm <sup>2</sup> )
3 (76)	SRMU0203D	SRMU0503D	SRMU1003D
4 (102)	SRMU0204D	SRMU0504D	SRMU1004D
5 (127)	SRMU0205D	SRMU0505D	SRMU1005D
6 (152)	SRMU0206D	SRMU0506D	SRMU1006D
7 (178)	SRMU0207D	SRMU0507D	SRMU1007D
8 (203)	SRMU0208D	SRMU0508D	SRMU1008D
9 (229)	SRMU0209D	SRMU0509D	SRMU1009D
10 (254)	SRMU0210D	SRMU0510D	SRMU1010D
11 (279)	SRMU0211D	SRMU0511D	SRMU1011D
12 (305)	SRMU0212D	SRMU0512D	SRMU1012D

## Square/Rectangular SRMU Heat Blanket Part Number Guide

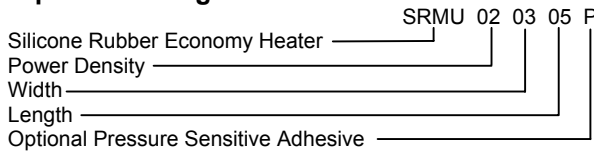


### 1" Wide Blankets

Width in (mm)	Length in (mm)	2.5Watts/in <sup>2</sup> (.004 Watts/mm <sup>2</sup> )	5Watts/in <sup>2</sup> (.007 Watts/mm <sup>2</sup> )	10 Watts/in <sup>2</sup> (.016 Watts/mm <sup>2</sup> )
1 (25)	1 (25)	N/A	N/A	SRMU100101
1 (25)	2 (51)	N/A	SRMU050102	SRMU100102
1 (25)	3 (76)	SRMU020103	SRMU050103	SRMU100103
1 (25)	4 (102)	SRMU020104	SRMU050104	SRMU100104
1 (25)	5 (127)	SRMU020105	SRMU050105	SRMU100105
1 (25)	6 (152)	SRMU020106	SRMU050106	SRMU100106
1 (25)	7 (178)	SRMU020107	SRMU050107	SRMU100107
1 (25)	8 (203)	SRMU020108	SRMU050108	SRMU100108
1 (25)	9 (229)	SRMU020109	SRMU050109	SRMU100109
1 (25)	10 (254)	SRMU020110	SRMU050110	SRMU100110
1 (25)	11 (279)	SRMU020111	SRMU050111	SRMU100111
1 (25)	12 (305)	SRMU020112	SRMU050112	SRMU100112
1 (25)	18 (457)	SRMU020118	SRMU050118	SRMU100118
1 (25)	24 (610)	SRMU020124	SRMU050124	SRMU100124
1 (25)	30 (762)	SRMU020130	SRMU050130	SRMU100130
1 (25)	36 (914)	SRMU020136	SRMU050136	SRMU100136
1 (25)	42 (1067)	SRMU020142	SRMU050142	SRMU100142
1 (25)	48 (1219)	SRMU020148	SRMU050148	SRMU100148

### 2" Wide Blankets

Width in (mm)	Length in (mm)	2.5Watts/in <sup>2</sup> (.004 Watts/mm <sup>2</sup> )	5Watts/in <sup>2</sup> (.007 Watts/mm <sup>2</sup> )	10 Watts/in <sup>2</sup> (.016 Watts/mm <sup>2</sup> )
2 (50.8)	2 (51)	SRMU020202	SRMU050202	SRMU100202
2 (50.8)	3 (76)	SRMU020203	SRMU050203	SRMU100203
2 (50.8)	4 (102)	SRMU020204	SRMU050204	SRMU100204
2 (50.8)	5 (127)	SRMU020205	SRMU050205	SRMU100205
2 (50.8)	6 (152)	SRMU020206	SRMU050206	SRMU100206
2 (50.8)	7 (178)	SRMU020207	SRMU050207	SRMU100207
2 (50.8)	8 (203)	SRMU020208	SRMU050208	SRMU100208
2 (50.8)	9 (229)	SRMU020209	SRMU050209	SRMU100209
2 (50.8)	10 (254)	SRMU020210	SRMU050210	SRMU100210
2 (50.8)	11 (279)	SRMU020211	SRMU050211	SRMU100211
2 (50.8)	12 (305)	SRMU020212	SRMU050212	SRMU100212
2 (50.8)	18 (457)	SRMU020218	SRMU050218	SRMU100218
2 (50.8)	24 (610)	SRMU020224	SRMU050224	SRMU100224
2 (50.8)	30 (762)	SRMU020230	SRMU050230	SRMU100230
2 (50.8)	36 (914)	SRMU020236	SRMU050236	SRMU100236
2 (50.8)	42 (1067)	SRMU020242	SRMU050242	SRMU100242
2 (50.8)	48 (1219)	SRMU020248	SRMU050248	SRMU100248

BriskHeat® Economy Silicone Rubber Heating Blankets/Pads (SRMU Series) are designed to solve a variety of heating applications. The heaters range in size from 1" (25mm) by 1" (25mm), to 12" (305mm) by 24" (610mm), with circular heaters also available.

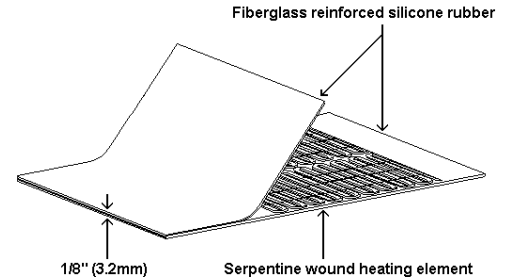

### Specifications:

- Operating voltage of 120VAC
- 12 inch (305mm) TEFLON® extruded leads standard
- \*Additional length available
- Heating element is laminated between two layers of, 15 mil, fiberglass reinforced silicone rubber
- Silicone rubber density of 16.8 oz/yd<sup>2</sup> (570 grams/M<sup>2</sup>) per layer
- 450°F (232°C) maximum exposure temperature
- -60°F (-51°C) minimum exposure temperature
- Dielectric strength of over 2000 volts
- Moisture resistant
- Chemical resistant
- Radiation resistant

\*Additional lead length available in 1 inch increments from 12 to 96 inches. To specify additional lead length add the desired length to the end of the part number, see the examples below.


### ROUND

Standard 12 inch leads ----SRMU0206D  
Optional 96 inch leads SRMU0206D-096

### SQUARE/RECTANGULAR

Standard 12 inch leads ----SRMU020606  
Optional 96 inch leads -----SRMU020606-096




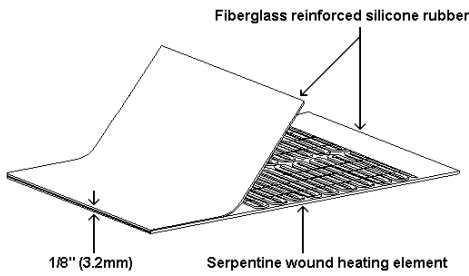

### Specifications:

- Operating voltage of 120VAC
- 12 inch (305mm) TEFLON® extruded leads standard
- \*Additional length available
- Heating element is laminated between two layers of, 15 mil, fiberglass reinforced silicone rubber
- Silicone rubber density of 16.8 oz/yd<sup>2</sup> (570 grams/M<sup>2</sup>) per layer
- 450°F (232°C) maximum exposure temperature
- -60°F (-51°C) minimum exposure temperature
- Dielectric strength of over 2000 volts
- Moisture resistant
- Chemical resistant
- Radiation resistant

### Square/Rectangular SRMU Heat Blanket Part Number Guide

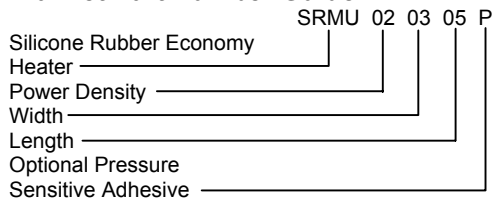

\*Additional lead length available in 1 inch increments from 12 to 96 inches. To specify additional lead length add the desired length to the end of the part number, see the examples below.

### SQUARE/RECTANGULAR

Standard 12 inch leads --- SRMU020606  
 Optional 96 inch leads ---- SRMU020606-096



### 3" Wide Blankets

Width in (mm)	Length in (mm)	2.5Watts/in <sup>2</sup> (.004 Watts/mm <sup>2</sup> )	5Watts/in <sup>2</sup> (.007 Watts/mm <sup>2</sup> )	10 Watts/in <sup>2</sup> (.016 Watts/mm <sup>2</sup> )
3 (76)	3 (76)	SRMU020303	SRMU050303	SRMU100303
3 (76)	4 (102)	SRMU020304	SRMU050304	SRMU100304
3 (76)	5 (127)	SRMU020305	SRMU050305	SRMU100305
3 (76)	6 (152)	SRMU020306	SRMU050306	SRMU100306
3 (76)	7 (178)	SRMU020307	SRMU050307	SRMU100307
3 (76)	8 (203)	SRMU020308	SRMU050308	SRMU100308
3 (76)	9 (229)	SRMU020309	SRMU050309	SRMU100309
3 (76)	10 (254)	SRMU020310	SRMU050310	SRMU100310
3 (76)	11 (279)	SRMU020311	SRMU050311	SRMU100311
3 (76)	12 (305)	SRMU020312	SRMU050312	SRMU100312
3 (76)	18 (457)	SRMU020318	SRMU050318	SRMU100318
3 (76)	24 (610)	SRMU020324	SRMU050324	SRMU100324
3 (76)	30 (762)	SRMU020330	SRMU050330	SRMU100330
3 (76)	36 (914)	SRMU020336	SRMU050336	SRMU100336
3 (76)	42 (1067)	SRMU020342	SRMU050342	SRMU100342
3 (76)	48 (1219)	SRMU020348	SRMU050348	SRMU100348

### 4" Wide Blankets

Width in (mm)	Length in (mm)	2.5Watts/in <sup>2</sup> (.004 Watts/mm <sup>2</sup> )	5Watts/in <sup>2</sup> (.007 Watts/mm <sup>2</sup> )	10 Watts/in <sup>2</sup> (.016 Watts/mm <sup>2</sup> )
4 (102)	4 (102)	SRMU020404	SRMU050404	SRMU100404
4 (102)	5 (127)	SRMU020405	SRMU050405	SRMU100405
4 (102)	6 (152)	SRMU020406	SRMU050406	SRMU100406
4 (102)	7 (178)	SRMU020407	SRMU050407	SRMU100407
4 (102)	8 (203)	SRMU020408	SRMU050408	SRMU100408
4 (102)	9 (229)	SRMU020409	SRMU050409	SRMU100409
4 (102)	10 (254)	SRMU020410	SRMU050410	SRMU100410
4 (102)	11 (279)	SRMU020411	SRMU050411	SRMU100411
4 (102)	12 (305)	SRMU020412	SRMU050412	SRMU100412
4 (102)	18 (457)	SRMU020418	SRMU050418	SRMU100418
4 (102)	24 (610)	SRMU020424	SRMU050424	SRMU100424
4 (102)	30 (762)	SRMU020430	SRMU050430	SRMU100430
4 (102)	36 (914)	SRMU020436	SRMU050436	SRMU100436
4 (102)	42 (1067)	SRMU020442	SRMU050442	SRMU100442
4 (102)	48 (1219)	SRMU020448	SRMU050448	N/A

### 5" Wide Blankets

Width in (mm)	Length in (mm)	2.5Watts/in <sup>2</sup> (.004 Watts/mm <sup>2</sup> )	5Watts/in <sup>2</sup> (.007 Watts/mm <sup>2</sup> )	10 Watts/in <sup>2</sup> (.016 Watts/mm <sup>2</sup> )
5 (127)	5 (127)	SRMU020505	SRMU050505	SRMU100505
5 (127)	6 (152)	SRMU020506	SRMU050506	SRMU100506
5 (127)	7 (178)	SRMU020507	SRMU050507	SRMU100507
5 (127)	8 (203)	SRMU020508	SRMU050508	SRMU100508
5 (127)	9 (229)	SRMU020509	SRMU050509	SRMU100509
5 (127)	10 (254)	SRMU020510	SRMU050510	SRMU100510
5 (127)	11 (279)	SRMU020511	SRMU050511	SRMU100511
5 (127)	12 (305)	SRMU020512	SRMU050512	SRMU100512

### 6" Wide Blankets

Width in (mm)	Length in (mm)	2.5Watts/in <sup>2</sup> (.004 Watts/mm <sup>2</sup> )	5Watts/in <sup>2</sup> (.007 Watts/mm <sup>2</sup> )	10 Watts/in <sup>2</sup> (.016 Watts/mm <sup>2</sup> )
6 (152)	6 (152)	SRMU020606	SRMU050606	SRMU100606
6 (152)	7 (178)	SRMU020607	SRMU050607	SRMU100607
6 (152)	8 (203)	SRMU020608	SRMU050608	SRMU100608
6 (152)	9 (229)	SRMU020609	SRMU050609	SRMU100609
6 (152)	10 (254)	SRMU020610	SRMU050610	SRMU100610
6 (152)	11 (279)	SRMU020611	SRMU050611	SRMU100611
6 (152)	12 (305)	SRMU020612	SRMU050612	SRMU100612
6 (152)	18 (457)	SRMU020618	SRMU050618	SRMU100618
6 (152)	24 (610)	SRMU020624	SRMU050624	SRMU100624
6 (152)	30 (762)	SRMU020630	SRMU050630	N/A
6 (152)	36 (914)	SRMU020636	SRMU050636	N/A
6 (152)	42 (1067)	SRMU020642	SRMU050642	N/A
6 (152)	48 (1219)	SRMU020648	SRMU050648	N/A

## 7" Wide Blankets

Width in (mm)	Length in (mm)	2.5Watts/in <sup>2</sup> (.004 Watts/mm <sup>2</sup> )	5Watts/in <sup>2</sup> (.007 Watts/mm <sup>2</sup> )	10 Watts/in <sup>2</sup> (.016 Watts/mm <sup>2</sup> )
7 (178)	7 (178)	SRMU020707	SRMU050707	SRMU100707
7 (178)	8 (203)	SRMU020708	SRMU050708	SRMU100708
7 (178)	9 (229)	SRMU020709	SRMU050709	SRMU100709
7 (178)	10 (254)	SRMU020710	SRMU050710	SRMU100710
7 (178)	11 (279)	SRMU020711	SRMU050711	SRMU100711
7 (178)	12 (305)	SRMU020712	SRMU050712	SRMU100712

## 8" Wide Blankets

Width in (mm)	Length in (mm)	2.5Watts/in <sup>2</sup> (.004 Watts/mm <sup>2</sup> )	5Watts/in <sup>2</sup> (.007 Watts/mm <sup>2</sup> )	10 Watts/in <sup>2</sup> (.016 Watts/mm <sup>2</sup> )
8 (203)	8 (203)	SRMU020808	SRMU050808	SRMU100808
8 (203)	9 (229)	SRMU020809	SRMU050809	SRMU100809
8 (203)	10 (254)	SRMU020810	SRMU050810	SRMU100810
8 (203)	11 (279)	SRMU020811	SRMU050811	SRMU100811
8 (203)	12 (305)	SRMU020812	SRMU050812	SRMU100812
8 (203)	18 (457)	SRMU020818	SRMU050818	SRMU100818
8 (203)	24 (607)	SRMU020824	SRMU050824	N/A
8 (203)	30 (762)	SRMU020830	SRMU050830	N/A
8 (203)	36 (914)	SRMU020836	SRMU050836	N/A
8 (203)	42 (1067)	SRMU020842	SRMU050842	N/A
8 (203)	48 (1219)	SRMU020848	SRMU050848	N/A

## 9" Wide Blankets

Width in (mm)	Length in (mm)	2.5Watts/in <sup>2</sup> (.004 Watts/mm <sup>2</sup> )	5Watts/in <sup>2</sup> (.007 Watts/mm <sup>2</sup> )	10 Watts/in <sup>2</sup> (.016 Watts/mm <sup>2</sup> )
9 (229)	9 (229)	SRMU020909	SRMU050909	SRMU100909
9 (229)	10 (254)	SRMU020910	SRMU050910	SRMU100910
9 (229)	11 (279)	SRMU020911	SRMU050911	SRMU100911
9 (229)	12 (305)	SRMU020912	SRMU050912	SRMU100912

## 10" Wide Blankets


Width in (mm)	Length in (mm)	2.5Watts/in <sup>2</sup> (.004 Watts/mm <sup>2</sup> )	5Watts/in <sup>2</sup> (.007 Watts/mm <sup>2</sup> )	10 Watts/in <sup>2</sup> (.016 Watts/mm <sup>2</sup> )
10 (254)	10 (254)	SRMU021010	SRMU051010	SRMU101010
10 (254)	11 (279)	SRMU021011	SRMU051011	SRMU101011
10 (254)	12 (305)	SRMU021012	SRMU051012	SRMU101012
10 (254)	18 (457)	SRMU021018	SRMU051018	N/A
10 (254)	24 (607)	SRMU021024	SRMU051024	N/A
10 (254)	30 (762)	SRMU021030	SRMU051030	N/A
10 (254)	36 (914)	SRMU021036	SRMU051036	N/A
10 (254)	42 (1067)	SRMU021042	N/A	N/A
10 (254)	48 (1219)	SRMU021048	N/A	N/A

## 11" Wide Blankets

Width in (mm)	Length in (mm)	2.5Watts/in <sup>2</sup> (.004 Watts/mm <sup>2</sup> )	5Watts/in <sup>2</sup> (.007 Watts/mm <sup>2</sup> )	10 Watts/in <sup>2</sup> (.016 Watts/mm <sup>2</sup> )
11 (279)	11 (279)	SRMU021111	SRMU051111	SRMU101111
11 (279)	12 (305)	SRMU021112	SRMU051112	SRMU101112

## 12" Wide Blankets


Width in (mm)	Length in (mm)	2.5Watts/in <sup>2</sup> (.004 Watts/mm <sup>2</sup> )	5Watts/in <sup>2</sup> (.007 Watts/mm <sup>2</sup> )	10 Watts/in <sup>2</sup> (.016 Watts/mm <sup>2</sup> )
12 (305)	12 (305)	SRMU021212	SRMU051212	N/A
12 (305)	18 (457)	SRMU021218	SRMU051218	N/A
12 (305)	24 (607)	SRMU021224	SRMU051224	N/A
12 (305)	30 (762)	SRMU021230	N/A	N/A
12 (305)	36 (914)	SRMU021236	N/A	N/A
12 (305)	42 (1067)	SRMU021242	N/A	N/A
12 (305)	48 (1219)	SRMU021248	N/A	N/A

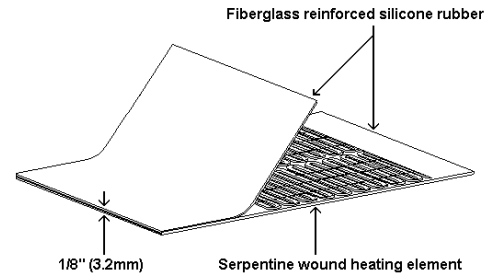

### Specifications:

- Operating voltage of 120VAC
- 12 inch (305mm) TEFLON<sup>®</sup> extruded leads standard  
\*Additional length available
- Heating element is laminated between two layers of, 15 mil, fiberglass reinforced silicone rubber
- Silicone rubber density of 16.8 oz/yd<sup>2</sup> (570 grams/M<sup>2</sup>) per layer
- 450°F (232°C) maximum exposure temperature
- -60°F (-51°C) minimum exposure temperature
- Dielectric strength of over 2000 volts
- Moisture resistant
- Chemical resistant
- Radiation resistant

### Square/Rectangular SRMU Heat Blanket Part Number Guide

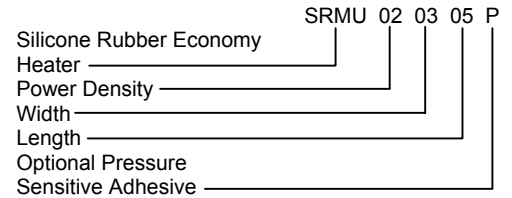

\*Additional lead length available in 1 inch increments from 12 to 96 inches. To specify additional lead length add the desired length to the end of the part number, see the examples below.

### SQUARE/RECTANGULAR

Standard 12 inch leads ---- SRMU020606  
Optional 96 inch leads ----- SRMU020606-096



### Temperature Controller Required



Required